



FSE




dry-expansion evaporator

ADVANCED HEAT EXCHANGERS

The new dry-expansion evaporator FSE has been developed to respond to Air Conditioning, Data Center and Process Cooling application demands. FSE employs a refrigerant distribution system which has been optimized to manage multiple refrigerants in order to respond to the new EU F-Gas regulation proposal with R290, R600a or with the traditional HFC, HFO low pressure refrigerants.

The FSE design has been optimized by R&D by using a fluid dynamic simulation analysis (CFD) and internal thermal design simulation tools. The efficiency of water side has been improved by reducing the pressure drop. CFD has also contributed to improve the refrigerant distribution and allowed to optimize distributors specific for Data Center applications.


We have confirmed the calculations with extensive test campaign in Onda's laboratory.

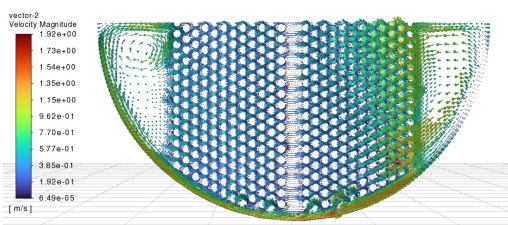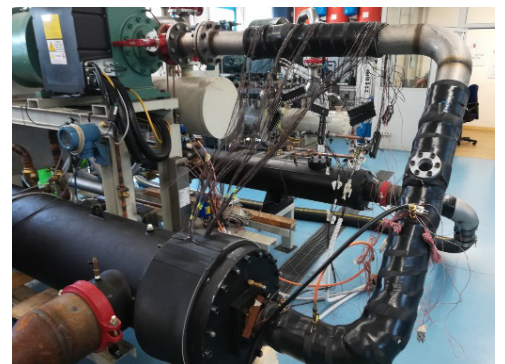

BENEFITS

- **Reliability:** FSE thermal performance has been validated in Onda's laboratory with an extensive test campaign covering different operating conditions for Air Conditioning and Data Center applications. Capacity range from 300 – 1200 kW with R513A and R1234ze refrigerants.
- **Thermal efficiency:** +20% average vs previous SSE model
- **Less refrigerant charge:** -18% average vs previous SSE model
- **Multiple distribution systems** optimized for low and mid pressure refrigerants.

TECHNICAL FEATURES

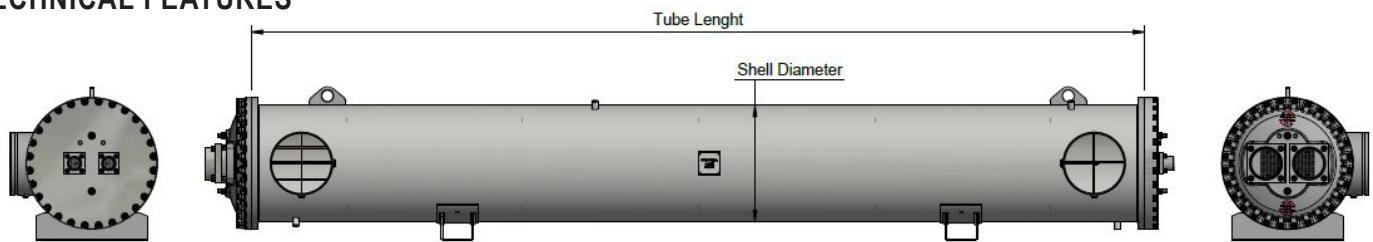

Dshell	Circuits numb	Water nozzle*	Tubes Length [mm]						
			1800	2115	2750	3000	3300	3600	3900
273	1,2	DN-125	X	X	X	X	X		
324	1,2,3	DN-150	X	X	X	X	X	X	
406	1,2,3,4	DN-150	X	X	X	X	X	X	X
508	2,3,4	DN-200	X	X	X		X	X	X
610	2,3,4	DN-250	X	X	X		X	X	X

(*) Dimension could change according to the operating conditions.

Water nozzle connections orientation from: Right, Left

Pressure vessel codes: PED/CE , ASME VIII Div 1, other codes are available on demand.

	Tube side	Shell side
PS [barg]	18	10
TS [°C]	-10/+90	-10/+90

MATERIALS – STANDARD CONFIGURATION

Major components	Material
Tubes	2 wall thickness available
Baffles	Plastic
Tube sheet	Carbon steel
Shell	Carbon steel
Headers	Carbon steel, cast iron

ONDA S.p.A.

PLANT 1 Headquarters
Via Dante Alighieri, 27B
36065 Mussolente (VI) - Italy
t. +39 0424 87633

PLANT 2
Via L. Baden Powell, 11
36045 Lonigo (VI) - Italy
t. +39 0444 720720

PLANT 3
Via Vittoria, 158A
36065 Mussolente (VI) - Italy
t. +39 0424 87506

PLANT 4
Onda USA L.L.C.
600 London Rd
Delaware, OH 43015
t. +1 614 321 3342
www.onda-us.com
onda@onda-us.com

PLANT 5
Onda Nordic OY
Lentolantie 22 - 36220
Kangasala Tampere, Finland
t. +35 8331437300
m. +35 8409012999
www.ondanordic.com
pasi.makinen@ondanordic.com

Onda France S.A.R.L.
320, Avenue Berthelot
69008 Lyon France
t. +33 472784606
m. +33 608341000
www.onda-fr.com
abouzat@onda-fr.com

Onda Shanghai
Heat Exchanger Co., Ltd.
函蒾 (上海) 热交换有限公司
Shanghai, Changning District,
Anhua Road 492, Building 1 Tower A, Room 126
上海市长宁区安化路492号1幢 (A座) 126室A092
t. +86 021 6056 4838 (ext.1000)
m. +33 6 08 34 10 00

Onda RU
Mayakovskogo Street, 18a, Khimki,
Moscow Region, Russia 141402
t. +7 916 676 16 54
m. +7 495 971 88 53
www.onda-it.com
info@onda-ru.com

onda@onda-it.com
www.onda-it.com